

**Agilent**  
**N4373C**

**40/50/67 GHz Single-Mode  
Lightwave Component Analyzer  
for 40/100G electro-optical test  
Data Sheet**



**Agilent Technologies**

## General Information

Agilent's N4373C Lightwave Component Analyzer (LCA) offers a modulation bandwidth of 50/67 GHz which makes it the ideal choice to develop and characterize electro-optical components, for the upcoming 40G/10GbE as defined in IEEE802.3ba.

### Accuracy

For these modern optical transmission systems with advanced modulation schemes it is key for the electro-optical components to have very flat S21 transfer function in amplitude and delay. This performance can be achieved only with electro-optical S-parameter test as provided by the N4373C LCA.

In addition fast, accurate, repeatable and traceable characterization of these electro-optical components, like lasers, modulators and detectors is required, to guarantee the performance with respect to modulation bandwidth, jitter, gain, and distortion.

By optimizing the electrical and the optical design of the N4373C for lowest noise and ripple, the accuracy has been improved by more than a factor of 2, compared to its predecessor, the 86030A 50GHz LCA. This increased accuracy improves the yield from tests performed with the N4373C by narrowing margins needed to pass the tested devices.

This advanced design together with temperature-stabilized transmitter and receiver ensures repeatable measurements over hours without recalibration

### Turn-key solution

The fully integrated "turn-key" N4373C helps reduce time to market, compared to the time-consuming development of a self-made setup. In addition you get a fully specified easy transferable and reliable test instrument. With guaranteed specifications Agilent takes the responsibility to provide you with accurate and traceable test results that can only be achieved in a turn-key solution.

### High productivity

The N4373C achieves fast measurements by including the E8361/63C Performance Network Analyzer. A unique new calibration concept significantly reduces setup time to a maximum of several minutes, depending on the selected measurement parameters. This results in increased productivity in R&D or on the manufacturing floor.

Using the advanced measurement capabilities of the network analyzer, all S-parameter related characteristics of the device under test, like responsivity and 3dB-cutoff frequency, can be qualified with the new N4373C Lightwave Component Analyzer from 10 MHz to 40/50/67 GHz.

### Network analyzer

The N4373C LCA is based on the new E8361/63C or the newest N5245A network analyzer with an identical and well known user interface across all Agilent network analyzers.

## Key benefits

- **High absolute and relative accuracy measurements improve the yield of development and production processes. With the excellent accuracy and reproducibility, measurement results can be compared among test locations world wide.**
- **Traceable balanced measurements up to 50 GHz**
- **High confidence and fast time-to-market with a NIST-traceable turnkey solution.**
- **Significantly increased productivity using the fast and easy measurement setup with an unique new calibration process leads to lower cost of test.**
- **External optical source input option to test at customer selected wavelength.**
- **Common PNA and LCA user interface across all N437xB/C LCA series.**
- **Identical LCA software and remote control across the N437xB/C family simplifies integration.**

#### Relative frequency response uncertainty:

± 0.8 dB @ 50 GHz (typ)

± 1.3 dB @ 65 GHz (typ)

#### Absolute frequency response uncertainty:

± 1.2 dB @ 50 GHz (typ)

± 1.8 dB @ 65 GHz (typ)

#### Noise floor:

-60(55) dB(A/W) for O/E measurements @ 50(65) GHz

-64(59) dB(W/A) for E/O measurements @ 50(65) GHz

#### Typical phase uncertainty:

±2.3°

#### Transmitter wavelength:

1550nm ± 20 nm

1310nm ± 10 nm

1290 - 1610 nm with external source input

#### Built-in optical power meter

For fast transmitter power verification

#### Powerful remote control:

State of the art programming interface based on Microsoft .NET or COM.

#### Warranty:

1 year warranty is standard for the N4373C Lightwave Component Analyzer.

Extension to 3 or 5 years available on request.

## Agilent N4373C Applications

In digital photonic transmission systems, the performance is ultimately determined by Bit Error Ratio Test (BERT). As this parameter describes the performance of the whole system, it is necessary to design and qualify subcomponents like modulators and PIN detectors, which are analog by nature, with different parameters that reflect their individual performance.

These components significantly influence the overall performance of the transmission system with the following parameters:

- 3dB bandwidth of the electro-optical transmission.
- Relative frequency response, quantifying the electro-optical shape of the conversion.
- Absolute frequency response, relating to the conversion efficiency of signals from the input to the output, or indicating the gain of a receiver.
- Electrical reflection at the RF port.
- Group delay of the electro-optical transfer function.

Only a careful design of these electro-optical components over a wide modulation signal bandwidth guarantees successful operation in the transmission system.

### Electro-optical components

The frequency response of detector diodes, modulators and directly modulated lasers typically depends on various parameters, like bias voltages, optical input power, operating current and ambient temperature. To determine the optimum operating point of these devices, an LCA helps by making a fast characterization of the electro-optic transfer function while optimizing these operating conditions.

In manufacturing it is important to be able to monitor the processes in regular time slots to keep up the throughput and yield. In this case the LCA is the tool of choice to monitor transmission characteristic and absolute responsivity of the manufactured device.

### Electrical components

Electrical components such as amplifiers, filters and transmission lines are used in modern transmission systems and require characterization to ensure optimal performance. Typical measurements are bandwidth, insertion loss or gain, impedance match and group delay.

## Agilent N4373C Features

### Turnkey solution

In today's highly competitive environment, short time-to-market with high quality is essential for new products. Instead of developing a home-grown measurement solution, which takes a lot of time and is limited in transferability and support, a fully specified and supported solution helps to focus resources on faster development and on optimizing the manufacturing process.

In the N4373C all optical and electrical components are carefully selected and matched to each other to minimize noise and ripple in the measurement traces. Together with the temperature stabilized environment of the core components, this improves the repeatability and the accuracy of the overall system. Extended factory calibration data at various optical power levels ensures accurate and reliable measurements that can only be achieved with an integrated solution like the N4373C.

### Easy calibration

An LCA essentially measures the conversion relation between optical and electrical signals. This is why user calibration of such systems can evolve into a time consuming task. With the new calibration process implemented in the N4373C, the tasks that have to be done by the user are reduced to one pure electrical calibration. The calibration with an electrical calibration module is automated and needs only minimal manual interaction.

### Built-in performance verification

Sometimes it is necessary to make a quick verification of the validity of the calibration and the performance of the system. The N4373C's unique calibration process allows the user to perform a self-test without external reference devices. This gives full confidence that the system performance is within the user's required uncertainty bands.

### State-of-the-art remote control

Testing the frequency response of electro-optical components under a wide range of parameters, which is often necessary in qualification cycles, is very time consuming. To support the user in minimizing the effort for performing this huge number of tests, all functions of the LCA can be controlled remotely via LAN over the state-of-the-art Microsoft .NET or COM interface. This interface is identical for all LCA of the N437xB/C series.

Based on programming examples for VBA with Excel, Agilent VEE and C++, it is very easy for every user to build applications for their requirements.

These examples cover applications like integration of complete LCA measurement sequences.

## Balanced measurements

With the option N43973C-303/314 the N4373C offers balanced measurements up to 50 GHz to test PIN TIA combinations with differential outputs in one measurement. This offers additional analysis capabilities of common mode transfer function or gain imbalance measurements.

## Integrated optical power meter

In applications where optical power dependence characterization is needed, the average power meter can be used to set the exact average output power of the LCA transmitter by connecting the LCA optical transmitter output, optionally through an optical attenuator, to the LCA optical receiver input. By adjusting the transmitter output power in the LCA user interface or the optical attenuation, the desired transmitter optical power can be set.

In cases where an unexpectedly low responsivity is measured from the device under test, it is very helpful to get a fast indication of the CW optical power that is launched into the LCA receiver. The cause might be a bad connection or a bent fiber in the setup. For this reason too, a measurement of the average optical power at the LCA receiver is very helpful for fast debugging of the test setup.

## Selectable output power of the transmitter

Most PIN diodes and receiver optical subassemblies need to be characterized at various average optical power levels. In this case it is necessary to set the average input power of the device under test to the desired value. The variable average optical output power of the LCA transmitter offers this feature. Together with an external optical attenuator, this range can be extended to all desired optical power levels.

## Group delay and length measurements

In some applications it is necessary to determine the electrical or optical length of a device. With the internal length calibration of the electro-optical paths with reference to the electrical and optical inputs or outputs, it is possible to determine the length of the device under test

## External optical source input

For applications where test of opto-electric devices need to be done at a specific optical wavelength like proposed in the IEEE 802.3ba standard, the N4373C-050 option offers an external optical input to the internal modulator where an external tunable laser can be applied. As modulators are polarization sensitive devices, this input is a PMF input to a PMF optical switch to maintain the polarization at the internal modulator and keep loss at a minimum.

This external optical source input is required when O/E devices with integrated filter are to be characterized, or generally when the O/E converter needs to be tested at different wavelengths than the internal source.

## Definitions

Generally, all specifications are valid at the stated operating and measurement conditions and settings, with uninterrupted line voltage.

### Specifications (guaranteed)

Describes warranted product performance that is valid under the specified conditions.

Specifications include guard bands to account for the expected statistical performance distribution, measurement uncertainties changes in performance due to environmental changes and aging of components.

### Typical values (characteristics)

Characteristics describe the product performance that is usually met but not guaranteed. Typical values are based on data from a representative set of instruments.

### General characteristics

Give additional information for using the instrument. These are general descriptive terms that do not imply a level of performance.

## Explanation of terms

### Responsivity

For electro-optical devices (e.g. modulators ) this describes the ratio of the optical modulated output signal amplitude compared to the RF input amplitude of the device.

For opto-electrical devices (e.g. photodiodes) this describes the ratio of the RF amplitude at the device output to the amplitude of the modulated optical signal input.

### Relative frequency response uncertainty

Describes the maximum deviation of the shape of a measured trace from the (unknown) real trace. This specification has strong influence on the accuracy of the 3-dB cut-off frequency determined for the device under test.

### Absolute frequency response uncertainty

Describes the maximum difference between any amplitude point of the measured trace and the (unknown) real value. This specification is useful to determine the absolute responsivity of the device versus modulation frequency.


### Frequency response repeatability

Describes the deviation of repeated measurement without changing any parameter or connection relative to the average of this measurements.

### Minimum measurable frequency response

Describes the average measured responsivity when no modulation signal is present at the device under test. This represents the noise floor of the measurement system.

## Definition of LCA input and output names

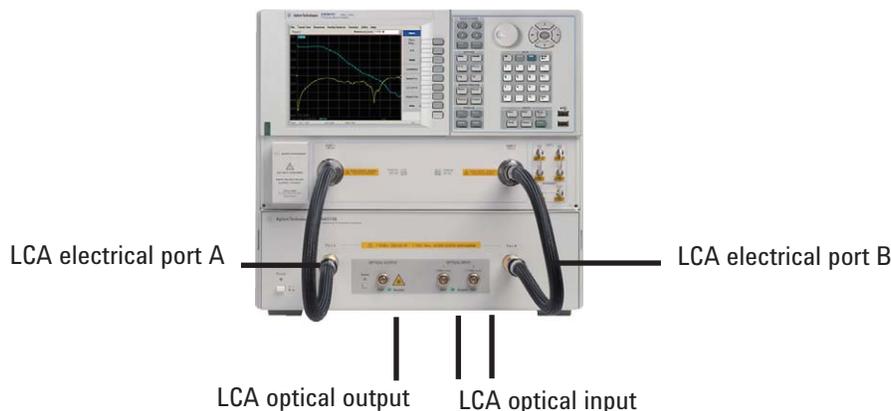

## Measurement capabilities

3dB cut-off frequency (S21),  
Responsivity (S21),  
Electrical reflection (S11 or S22),  
Group Delay vs. frequency,  
Insertion Loss (IL),  
Transmission bandwidth,  
all electrical S-parameter measurements.

## Target test devices

### Transmitter (E/O)

- Mach-Zehnder modulators
- Electro-absorption modulators (EAM)
- Directly modulated lasers
- Transmitter optical subassemblies (TOSA)

### Receiver (O/E)

- PIN diodes
- Avalanche photodiodes (APD)
- Receiver optical subassemblies (ROSA)

### Optical (O/O)

- Passive optical components
- Optical fibers and filters
- Optical transmission systems

## Agilent N4373C Specifications

### Measurement conditions

- Network analyzer set to -8 dBm electrical output power
- Modulation frequency range from 10 MHz to 40/50/65 GHz, depending on selected network analyzer option
- Number of averages: 1
- 100 Hz IFBW ("Reduce IF bandwidth at low frequency" enabled) with modulation frequency step size 10 MHz and measurement points on a 10 MHz raster (if not differently stated).
- Network analyzer set to "stepped sweep" – sweep moves in discrete steps"
- Port 2 (4, for option 314) of network analyzer configured in reverse coupler configuration ("RCVB B in" to "CPLR THRU", "SOURCE OUT" to "CPLR ARM")
- After full two-port electrical calibration using an Electronic Calibration Module, Agilent N4694A, at constant temperature ( $\pm 1^\circ\text{C}$ ).
- Modulation-bias optimization set to "every sweep"
- Using the supplied flexible test port cables 1.85mm f m (Part Number N4697-60200).
- Measurement frequency grid equals electrical calibration grid.
- Tested from Port 1 to Port 2 (4, for option 314)
- DUT signal delay  $\leq 0.1/\text{IF-BW}$ .
- Specified temperature range:  $+20^\circ\text{C}$  to  $+26^\circ\text{C}$ .
- After warm-up time of 90 minutes.
- Using high quality electrical and optical connectors in perfect condition.
- Using internal laser source.
- All specifications for Exx option are typical.

The optical test set always has angled connectors. Depending on the selected option (-021 straight, -022 angled) the appropriate jumper cable will be delivered. This jumper cable must always be used in front to the optical test set to protect the connectors at the optical test set and is required for performance tests

## Transmitter and Receiver Specifications

Optical Test set		Option -302, -303, -314, -392, -393, -394, Exx options typical
Operation frequency range	option -302/-392/-E92 option -303/-393/-E93 option -314/-394/-E94	10 MHz to 67 GHz 10 MHz to 40 GHz 10 MHz to 50 GHz
Connector type	optical input	SMF angled with Agilent versatile connector interface
	optical output	
	optical source input (rear)	PMF angled, with Agilent versatile connector interface, polarization orientation aligned with connector key
	RF	1.85 mm male (-302, -392) 2.4 mm male (-303, -314, -393, -394)
<b>LCA optical input</b>		
Operating input wavelength range		1290 nm to 1610 nm <sup>[f4]</sup>
Maximum linear average input power <sup>[f1]</sup>		Optical input 1: +4 dBm @ 1310 nm +5 dBm @ 1550 nm Optical input 2: +14 dBm @ 1310 nm +15 dBm @ 1550 nm
Maximum safe average input power		Optical input 1: +7 dBm Optical input 2: +17 dBm
Optical return loss (typ.) <sup>[f1]</sup>		> 25 dBo
Average power measurement range <sup>[f1]</sup>		Optical input 1: -25 dBm to +5 dBm on optical input 1 Optical input 2: -15 dBm to +15 dBm on optical input 2
Average power measurement uncertainty (typ.) <sup>[f1]</sup>		±0.5 dBo
<b>LCA optical output (internal source)</b>		
Optical modulation index (OMI) (typ.)		> 5 % @ -8 dBm RF power @ 1 GHz modulation frequency
Output wavelength	(option -100, 102) (option -101, 102)	(1310 ± 10) nm (1550 ± 20) nm
Average output power range		-1 dBm to +5 dBm @ 1550 nm -2 dBm to +4 dBm @ 1310 nm
Average output power uncertainty (typ.) <sup>[f2]</sup>		±0.5 dBo
Average output power stability, 15 minutes (typ.)		±0.5 dBo
<b>External optical source input (-050)</b>		
Required optical input power <sup>[f3]</sup>		+8 to + 15 dBm
Optical input power damage level		+20 dBm
Typical loss at quadrature bias point		9 dB
Operating input wavelength range		1290 nm to 1610 nm <sup>[f4]</sup>
<b>LCA RF test port input</b>		
Maximum safe input level at port A or B		+15 dBm RF, 7V DC

[f1] Wavelength within range as specified for LCA optical output.

[f2] After modulator optimization.

[f3] Required source characteristics: SMSR > 35dB, linewidth < 10MHz, power stability < 0.1dB pp, PER > 20dB, unmodulated, single mode.

[f4] Excluding water absorption wavelength.

# Specifications for electro to optical measurements at 1310 nm

(E/O mode)

N4373C system with network analyzer E8361C -014/E8363C-014 /N5245A-400

Specifications are valid under the stated measurement conditions.

- At optical input 1 (“+ 7 dBm max”). At optical input 2 (“+ 17 dBm max”), specifications are typically the same for 10 dB higher incident average and modulated optical power.
- For wavelength: (1310 ±10) nm (option -100,102).
- For N5245A-400 Network analyzer specification is limited to 50 GHz.
- For E8363C-014 Network analyzer specification is limited to 40 GHz.

System performance		0.05 GHz to 0.2 GHz	0.2 GHz to 0.7 GHz	0.7 GHz to 20 GHz	20 GHz to 50 GHz	50 GHz to 65 GHz
Relative frequency response uncertainty	DUT response					
	≥ -24 dB(W/A) <sup>[f1]</sup>	±0.8 dBe typ.	±1.0 dBe (±0.7 dBe typ)	±1.1 dBe (±0.8 dBe typ)	±1.1 dBe (±0.8 dBe typ)	±2.4 dBe (±1.7 dBe typ)
	≥ -34 dB(W/A) (typical)	±0.8 dBe	±0.8 dBe	±0.8 dBe	±0.8 dBe	±1.8 dBe
	≥ -44 dB(W/A) (typical)	±0.9 dBe	±0.9 dBe	±0.9 dBe	±2.2 dBe	±4.0 dBe
Absolute frequency response uncertainty	DUT response					
	≥ 24 dB(W/A) <sup>[f1]</sup>	±1.7 dBe typ	±2.4 dBe (±1.7 dBe typ)	±2.6 dBe (±1.8 dBe typ)	±2.7 dBe (±1.9 dBe typ)	±3.2 dBe (±2.2 dBe typ)
Frequency response repeatability (typ)	DUT response					
	≥ -24 dB(W/A) <sup>[f1]</sup>	±0.03 dBe	±0.03 dBe	±0.05 dBe	±0.15 dBe	±0.25 dBe
	≥ -34 dB(W/A)	±0.03 dBe	±0.03 dBe	±0.11 dBe	±0.4 dBe	±0.8 dBe
	≥ -44 dB(W/A)	±0.03 dBe	±0.03 dBe	±0.6 dBe	±1.3 dBe	±2.2 dBe
Minimum measurable frequency response (noise floor) <sup>[f2][f4]</sup>		-64 dB(W/A)	-64 dB(W/A)	-64 dB(W/A)	-64 dB(W/A)	-59 dB(W/A)
Phase uncertainty (typ.) <sup>[f3]</sup>	DUT response					
	≥ -24 dB(W/A) <sup>[f1]</sup>	±3.5°	±3.0°	±2.7°	±3.7°	±5.5°
	≥ -34 dB(W/A)	±3.5°	±3.5°	±2.7°	±4.8°	±9.0°
Group delay uncertainty	Derived from phase uncertainty, see section “Group delay uncertainty”. Example: ±2.0° → ±8 ps (1 GHz aperture)					

[f1] For DUT response max. -13 dB(W/A).

[f2] IFBW = 10 Hz.

[f3] Except phase wrap aliasing (example: a DUT group delay of 5 ns (1 m cable length) requires a frequency step size of ≤ 0.2 GHz to avoid phase wraps). Excluding a constant group delay offset of <±0.3 ns typ. (cable length uncertainty < ±0.06 m). A constant group delay offset leads to a phase offset  $\Delta\phi = 360^\circ \times \Delta GD \times f_{mod}$  (in deg).

[f4] Average value over frequency range.

# Specifications for electro to optical measurements at 1550 nm

(E/O mode)

N4373C system with network analyzer E8361C -014/E8363C-014 /N5245A-400

Specifications are valid under the stated measurement conditions.

- At optical input 1 (“+ 7 dBm max”). At optical input 2 (“+ 17 dBm max”), specifications are typically the same for 10 dB higher incident average and modulated optical power.
- For wavelength: (1550 ±20) nm (option -101, 102).
- For N5245A-400 Network analyzer specification is limited to 50 GHz.
- For E8363C-014 Network analyzer specification is limited to 40 GHz.

System performance		0.05 GHz to 0.2 GHz	0.2 GHz to 0.7 GHz	0.7 GHz to 20 GHz	20 GHz to 50 GHz	50 GHz to 65 GHz
Relative frequency response uncertainty	DUT response					
	≥ -26 dB(W/A) <sup>[f1]</sup>	±0.7 dBe typ.	±0.8 dBe (±0.6 dBe typ)	±0.8 dBe (±0.6 dBe typ)	±1.0 dBe (±0.7 dBe typ)	±1.6 dBe (±1.1 dBe typ)
	≥ -36 dB(W/A) (typical)	±0.7 dBe	±0.6 dBe	±0.6 dBe	±0.9 dBe	±1.3 dBe
	≥ -46 dB(W/A) (typical)	±0.7 dBe	±0.7 dBe	±0.7 dBe	±1.6 dBe	±2.7 dBe
Absolute frequency response uncertainty	DUT response					
	≥ -26 dB(W/A) <sup>[f1]</sup>	±1.2 dBe typ	±1.8 dBe (±1.2 dBe typ)	±1.8 dBe (±1.2 dBe typ)	±1.9 dBe (±1.2 dBe typ)	±2.7 dBe (±1.8 dBe typ)
Frequency response repeatability (typ)	DUT response					
	≥ -26 dB(W/A) <sup>[f1]</sup>	±0.02 dBe	±0.02 dBe	±0.02 dBe	±0.1 dBe	±0.2 dBe
	≥ -36 dB(W/A)	±0.02 dBe	±0.02 dBe	±0.02 dBe	±0.3 dBe	±0.5 dBe
	≥ -46 dB(W/A)	±0.02 dBe	±0.02 dBe	±0.1 dBe	±1 dBe	±2.0 dBe
Minimum measurable frequency response (noise floor) <sup>[f2][f4]</sup>		-64 dB(W/A)	-64 dB(W/A)	-64 dB(W/A)	-64 dB(W/A)	-59 dB(W/A)
Phase uncertainty (typ.) <sup>[f3]</sup>	DUT response					
	≥ -26 dB(W/A) <sup>[f1]</sup>	±3.5°	±3.0°	±2.3°	±3.2°	±4.5°
	≥ -36 dB(W/A)	±5.5°	±3.5°	±2.3°	±4.2°	±6.5°
Group delay uncertainty	Derived from phase uncertainty, see section “Group delay uncertainty”. Example: ±2.0° → ±8 ps (1 GHz aperture)					

[f1] For DUT response max. -13 dB(W/A).

[f2] IFBW = 10 Hz.

[f3] Except phase wrap aliasing (example: a DUT group delay of 5 ns (1 m cable length) requires a frequency step size of ≤ 0.2 GHz to avoid phase wraps). Excluding a constant group delay offset of <±0.3 ns typ. (cable length uncertainty < ±0.06 m). A constant group delay offset leads to a phase offset  $\Delta\phi = 360^\circ \times \Delta GD \times f_{mod}$  (in deg).

[f4] Average value over frequency range.

# Specifications for optical to electrical measurements at 1310 nm

(O/E mode)

N4373C system with network analyzer

E8361C -014/E8363C-014 /N5245A-400

Specifications are valid under the stated measurement conditions.

- For external source optical input all specifications are typical <sup>[f2][f5][f6]</sup>.
- For wavelength: (1310 ±10) nm (option -100,102).
- For N5245A-400 Network analyzer specification is limited to 50 GHz.
- For E8363C-014 Network analyzer specification is limited to 40 GHz.

System performance		0.05 GHz to 0.2 GHz	0.2 GHz to 0.7 GHz	0.7 GHz to 20 GHz	20 GHz to 50 GHz	50 GHz to 65 GHz
Relative frequency response uncertainty <sup>[f2]</sup>	DUT response					
	≥ -19 dB(A/W) <sup>[f1]</sup>	±0.8 dBe typ.	±1.0 dBe (±0.7 dBe <sup>[f7]</sup> )	±1.1 dBe (±0.8 dBe <sup>[f7]</sup> )	±1.7 dBe (±1.2 dBe <sup>[f7]</sup> )	±2.2 dBe (±1.5 dBe <sup>[f7]</sup> )
	≥ -29 dB(A/W) (typical)	±0.8 dBe	±0.7 dBe	±0.8 dBe	±1.3 dBe	±1.6 dBe
	≥ -39 dB(A/W) (typical)	±0.9 dBe	±0.9 dBe	±0.9 dBe	±1.7 dBe	±2.8 dBe
Absolute frequency response uncertainty <sup>[f2]</sup>	DUT response					
	≥ -29 dB(A/W) <sup>[f1]</sup>	(±1.5 dBe <sup>[f7]</sup> )	±2.4 dBe (±1.5 dBe <sup>[f7]</sup> )	±2.4 dBe (±1.5 dBe <sup>[f7]</sup> )	±2.8 dBe (±1.8 dBe <sup>[f7]</sup> )	±3.2 dBe (±2.1 dBe <sup>[f7]</sup> )
Frequency response repeatability (typ) <sup>[f2]</sup>	DUT response					
	≥ -19 dB(A/W) <sup>[f1]</sup>	±0.03 dBe	±0.03 dBe	±0.05 dBe	±0.3 dBe	±0.5 dBe
	≥ -29 dB(A/W)	±0.03 dBe	±0.03 dBe	±0.15 dBe	±0.5 dBe	±0.7 dBe
	≥ -39 dB(A/W)	±0.03 dBe	±0.03 dBe	±0.3 dBe	±0.5 dBe	±0.8 dBe
Minimum measurable frequency response (noise floor) <sup>[f2][f3][f8]</sup>		-60 dB(A/W)	-60 dB(A/W)	-60 dB(A/W)	-60 dB(A/W)	-55 dB(A/W)
Phase uncertainty (typ.) <sup>[f2, f4]</sup>	DUT response					
	≥ -19 dB(A/W) <sup>[f1]</sup>	±3.5°	±3.0°	±2.7°	±4.4°	±6.0°
	≥ -29 dB(A/W)	±5.5°	±3.5°	±2.7°	±4.9°	±7.5°
Group delay uncertainty		Derived from phase uncertainty, see section "Group delay uncertainty". Example: ±2.0° → ±8 ps (1 GHz aperture)				

[f1] For DUT response max. -10 dB(A/W).

[f2] For +4 dBm average output power from LCA optical output.

[f3] IFBW = 10 Hz.

[f4] Except phase wrap aliasing (example: a DUT group delay of 5 ns (1 m cable length) requires a frequency step size of ≤0.2 GHz to avoid phase wraps). Excluding a constant group delay offset of <±0.3 ns typ. (cable length uncertainty <±0.06 m). A constant group delay offset leads to a phase offset  $\Delta\phi = 360^\circ \times \Delta GD \times f_{mod}$  (in deg).

[f5] After CW responsivity and user calibration with external source.

[f6] Requires option -100 or -102.

[f7] Typical with internal source.

[f8] Average value over frequency range.

# Specifications for optical to electrical measurements at 1550 nm

(O/E mode)

N4373C system with network analyzer

E8361C -014/E8363C-014 /N5245A-400

Specifications are valid under the stated measurement conditions.

- For external source optical input all specifications are typical <sup>[f2][f5][f6]</sup>.
- For wavelength: (1550 ±20) nm (option -101,102).
- For N5245A-400 Network analyzer specification is limited to 50 GHz.
- For E8363C-014 Network analyzer specification is limited to 40 GHz.

System performance		0.05 GHz to 0.2 GHz	0.2 GHz to 0.7 GHz	0.7 GHz to 20 GHz	20 GHz to 50 GHz	50 GHz to 65 GHz
Relative frequency response uncertainty <sup>[f2]</sup>	DUT response					
	≥ -15 dB(A/W) <sup>[f1]</sup>	±0.7 dBe typ.	±0.8 dBe (±0.6 dBe <sup>[f7]</sup> )	±0.9 dBe (±0.7 dBe <sup>[f7]</sup> )	±1.2 dBe (±0.8 dBe <sup>[f7]</sup> )	±1.9 dBe (±1.3 dBe <sup>[f7]</sup> )
	≥ -25 dB(A/W) (typical)	±0.8 dBe.	±0.7 dBe	±0.8 dBe	±0.9 dBe	±1.4 dBe
	≥ -35 dB(A/W) (typical)	±0.8 dBe.	±0.7 dBe	±0.8 dBe	±1.3 dBe	±1.7 dBe
Absolute frequency response uncertainty <sup>[f2]</sup>	DUT response					
	≥ -25 dB(A/W) <sup>[f1]</sup>	(±1.1 dBe <sup>[f7]</sup> )	±1.9 dBe (±1.1 dBe <sup>[f7]</sup> )	±1.9 dBe (±1.1 dBe <sup>[f7]</sup> )	±2.0 dBe (±1.2 dBe <sup>[f7]</sup> )	±2.8 dBe (±1.6 dBe <sup>[f7]</sup> )
Frequency response repeatability (typ) <sup>[f2]</sup>	DUT response					
	≥ -15 dB(A/W) <sup>[f1]</sup>	±0.02 dBe	±0.02 dBe	±0.02 dBe	±0.3 dBe	±0.5 dBe
	≥ -25 dB(A/W)	±0.02 dBe	±0.02 dBe	±0.02 dBe	±0.5 dBe	±0.7 dBe
	≥ -35 dB(A/W))	±0.02 dBe	±0.02 dBe	±0.06 dBe	±0.5 dBe	±0.8 dBe
Minimum measurable frequency response (noise floor) <sup>[f2][f3][f8]</sup>		-60 dB(A/W)	-60 dB(A/W)	-60 dB(A/W)	-60 dB(A/W)	-55 dB(A/W)
Phase uncertainty (typ.) <sup>[f2, f4]</sup>	DUT response					
	≥ -15 dB(A/W) <sup>[f1]</sup>	±3.5°	±3.0°	±2.4°	±3.2°	±5.0°
	≥ -25 dB(A/W)	±5.5°	±3.5°	±2.4°	±5.0°	±7.0°
Group delay uncertainty		Derived from phase uncertainty, see section "Group delay uncertainty". Example: ±2.0° → ±8 ps (1 GHz aperture)				

[f1] For DUT response max. -10 dB(A/W).

[f2] For +5 dBm average output power from LCA optical output.

[f3] IFBW = 10 Hz.

[f4] Except phase wrap aliasing (example: a DUT group delay of 5 ns (1 m cable length) requires a frequency step size of ≤0.2 GHz to avoid phase wraps). Excluding a constant group delay offset of <±0.3 ns typ. (cable length uncertainty <±0.06 m). A constant group delay offset leads to a phase offset  $\Delta\phi = 360^\circ \times \Delta GD \times f_{mod}$  (in deg).

[f5] After CW responsivity and user calibration with external source.

[f6] Requires option -101 or -102.

[f7] Typical with internal source.

[f8] Average value over frequency range.

# Specifications for optical to optical measurements at 1310 nm

(0/0 mode)

N4373C system with network analyzer E8361C -014/E8363C-014 /N5245A-400

Specifications are valid under the stated measurement conditions.

- At optical input 1 (“+7 dBm max”). At optical input 2 (“+17 dBm max”), specifications are typically the same for 10 dB higher incident average and modulated optical power.
- For external source optical input all specifications are typical <sup>[f2][f5][f6]</sup>.
- For wavelength: (1310 ±10) nm (option -100, 102).
- For N5245A-400 Network analyzer specification is limited to 50 GHz.
- For E8363C-014 Network analyzer specification is limited to 40 GHz.

System performance		0.05 GHz to 0.2 GHz	0.2 GHz to 0.7 GHz	0.7 GHz to 20 GHz	20 GHz to 50 GHz	50 GHz to 65 GHz
Relative frequency response uncertainty <sup>[f2]</sup>	DUT response					
	≥ -3 dBe (≥ -1.5 dBo) <sup>[f4]</sup>	±0.4 dBe typ. (±0.2 dBo)	±0.4 dBe (±0.2 dBo)	±0.4 dBe (±0.2 dBo)	±0.5 dBe (±0.25 dBo)	±0.6 dBe (±0.3 dBo)
	≥ -13 dBe (≥ -6.5 dBo) (typical)	±0.2 dBe (±0.1 dBo).	±0.2 dBe (±0.1 dBo)	±0.2 dBe (±0.1 dBo)	±0.7 dBe (±0.35 dBo)	±1.0 dBe (±0.5 dBo)
	≥ -23 dBe (≥ -11.5 dBo) (typical)	±0.2 dBe (±0.1 dBo).	±0.2 dBe (±0.1 dBo)	±0.2 dBe (±0.1 dBo)	±0.9 dBe (±0.45 dBo)	±1.5 dBe (±0.75 dBo)
Absolute frequency response uncertainty <sup>[f2]</sup>	DUT response					
	≥ -3 dBe (≥ -1.5 dBo) <sup>[f4]</sup>	±0.9 dBe typ. (±0.45 dBo)	±0.9 dBe (±0.45 dBo)	±0.9 dBe (±0.45 dBo)	±1.0 dBe (±0.50 dBo)	±1.2 dBe (±0.6 dBe)
Frequency response repeatability (typ.) <sup>[f2]</sup>	DUT response					
	≥ -3 dBe (≥ -1.5 dBo) <sup>[f4]</sup>	±0.02 dBe	±0.02 dBe	±0.03 dBe	±0.15 dBe	±0.3 dBe
	≥ -13 dBe (≥ -6.5 dBo)	±0.03 dBe	±0.03 dBe	±0.1 dBe	±0.4 dBe	±0.8 dBe
	≥ -23 dBe (≥ -11.5 dBo)	±0.03 dBe	±0.03 dBe	±0.1 dBe	±1 dBe	±1.5 dBe
Minimum measurable frequency response (noise floor) <sup>[f1][f2][f7]</sup>		-55 dBe typ. (-27.5 dBo)	-42 dBe (-21 dBo)	-42 dBe (-21 dBo)	-42 dBe (-21 dBo)	-36 dBe (-18 dBo)
Phase uncertainty (typ.) <sup>[f2,f3]</sup>	DUT response					
	≥ -3 dBe <sup>[f4]</sup> (≥ -1.5 dBo)	±3.5°	±3.0°	±2.2°	±2.7°	±3.5°
	≥ -13 dBe (≥ -6.5 dBo)	±5.5°	±3.5°	±2.2°	±3.3°	±4.0°
Group delay uncertainty	Derived from phase uncertainty, see section “Group delay uncertainty”. Example: ±2.0° → ±8 ps (1 GHz aperture)					

[f1] IFBW = 10 Hz.

[f2] For +4 dBm average output power from LCA optical output.

[f3] Except phase wrap aliasing (example: a DUT group delay of 5 ns (1 m cable length) requires a frequency step size of ≤ 0.2 GHz to avoid phase wraps).

[f4] For DUT response max. +6 dBe (+3 dBo) gain.

[f5] After CW responsivity and user calibration with external source.

[f6] Requires option -100 or -102.

[f7] Average value over frequency range.

# Specifications for optical to optical measurements at 1550 nm

(0/0 mode)

N4373C system with network analyzer

E8361C -014/E8363C-014 /N5245A-400

Specifications are valid under the stated measurement conditions.

- At optical input 1 (“+7 dBm max”). At optical input 2 (“+17 dBm max”), specifications are typically the same for 10 dB higher incident average and modulated optical power.
- For external source optical input all specifications are typical <sup>[f2][f5][f6]</sup>
- For wavelength: (1550 ±20) nm (option -101,102).
- For N5245A-400 Network analyzer specification is limited to 50 GHz.
- For E8363C-014 Network analyzer specification is limited to 40 GHz.

System performance		0.05 GHz to 0.2 GHz	0.2 GHz to 0.7 GHz	0.7 GHz to 20 GHz	20 GHz to 50 GHz	50 GHz to 65 GHz
Relative frequency response uncertainty <sup>[f2]</sup>	DUT response					
	≥ -3 dBe (≥ -1.5 dBo) <sup>[f4]</sup>	±0.3 dBe typ. (±0.15 dBo)	±0.3 dBe (±0.15 dBo)	±0.3 dBe (±0.15 dBo)	±0.4 dBe (±0.2 dBo)	±0.6 dBe (±0.3 dBo)
	≥ -13 dBe (≥ -6.5 dBo) (typical)	±0.2 dBe (±0.1 dBo).	±0.2 dBe (±0.1 dBo)	±0.2 dBe (±0.1 dBo)	±0.6 dBe (±0.3 dBo)	±1.0 dBe (±0.5 dBo)
	≥ -23 dBe (≥ -11.5 dBo) (typical)	±0.2 dBe (±0.1 dBo).	±0.2 dBe (±0.1 dBo)	±0.3 dBe (±0.15 dBo)	±0.7 dBe (±0.35 dBo)	±1.3 dBe (±0.65 dBo)
Absolute frequency response uncertainty <sup>[f2]</sup>	DUT response					
	≥ -3 dBe (≥ -1.5 dBo) <sup>[f4]</sup>	±0.4 dBe typ. (±0.2 dBo)	±0.4 dBe (±0.2 dBo)	±0.4 dBe (±0.2 dBo)	±0.7 dBe (±0.35 dBo)	±0.9 dBe (±0.45 dBe)
Frequency response repeatability (typ.) <sup>[f2]</sup>	DUT response					
	≥ -3 dBe (≥ -1.5 dBo) <sup>[f4]</sup>	±0.02 dBe	±0.02 dBe	±0.02 dBe	±0.1 dBe	±0.2 dBe
	≥ -13 dBe (≥ -6.5 dBo)	±0.02 dBe	±0.02 dBe	±0.02 dBe	±0.3 dBe	±0.5 dBe
	≥ -23 dBe (≥ -11.5 dBo)	±0.02 dBe	±0.02 dBe	±0.1 dBe	±1.0 dBe	±2.0 dBe
Minimum measurable frequency response (noise floor) <sup>[f1][f2][f7]</sup>		-55 dBe typ. (-27.5 dBo)	-42 dBe (-21 dBo)	-42 dBe (-21 dBo)	-42 dBe (-21 dBo)	-36 dBe (-18 dBo)
Phase uncertainty (typ.) <sup>[f2,f3]</sup>	DUT response					
	≥ -3 dBe <sup>[f4]</sup> (≥ -1.5 dBo)	±3.5°	±3.0°	±2.2°	±2.6°	±3.0°
	≥ -13 dBe (≥ -6.5 dBo)	±5.5°	±3.5°	±2.2°	±3.0°	±3.5°
Group delay uncertainty	Derived from phase uncertainty, see section “Group delay uncertainty”. Example: ±2.0° → ±8 ps (1 GHz aperture)					

[f1] IFBW = 10 Hz.

[f2] For +5 dBm average output power from LCA optical output.

[f3] Except phase wrap aliasing (example: a DUT group delay of 5 ns (1 m cable length) requires a frequency step size of ≤ 0.2 GHz to avoid phase wraps).

[f4] For DUT response max. +6 dBe (+3 dBo) gain.

[f5] After CW responsivity and user calibration with external source.

[f6] Requires option -100 or -102.

[f7] Average value over frequency range.

## Specifications for electrical-electrical measurements (E/E mode)

All specifications of the E8361C -014/E8363C-014 /N5245A-400 Network Analyzer apply depending on selected option -302/ -303/ -314  
Please see the corresponding Network Analyzer data sheet and User's Guide.

---

### Group delay uncertainty

For more details see specifications of the E8361/3C and N5245A

#### Group delay

Group delay is computed by measuring the phase change within a specified aperture (for aperture see below):

$$\text{GD [s]} = \frac{\text{Phase change [deg]}}{\text{Aperture [Hz]} * 360} \quad (1)$$

#### Group delay uncertainty

Is calculated from the specified phase uncertainty and from the aperture (for aperture see below):

$$\text{GD } [\pm\text{s}] = \frac{\text{Phase uncertainty } [\pm\text{deg}]}{\text{Aperture [Hz]} * 360} * \text{sqrt}(2) \quad (2)$$

#### Aperture

Determined by the frequency span and the number of points per sweep:

$$\text{Aperture:} \quad (\text{frequency span}) / (\text{number of points}-1)$$

#### GD Range

The maximum group delay is limited to measuring no more than  $\pm 180$  degrees of phase change within the selected aperture (see Equation 1).

## General Characteristics

	-302, -392	-303, 393	-314, -394
Weight, net	38 kg (84 lb)	38 kg (84 lb)	57 kg (126 lb)
Weight, shipping	58 kg (128 lb)	58 kg (128 lb)	58.2 kg (128 lb) & 25kg(55 lb)
Assembled dimensions (H x W x D)	41.3 cm x 43.8 cm x 47.3 cm (16.3 in x 17.3 in x 18.7 in)	41.3 cm x 43.8 cm x 47.3 cm (16.3 in x 17.3 in x 18.7 in)	41.3 cm x 43.8 cm x 60.5 cm (16.3 in x 17.3 in x 23.8 in)
Power requirements	100 to 240 V~, 50 to 60 Hz	100 to 240 V~, 50 to 60 Hz	100 to 240 V~, 50 to 60 Hz
	max. 400 VA	max. 400 VA	max 500
Shipping contents	1x E8361C-014	1x E8363C-014	1x N5245A-400
	1x N4373C optical test set	1x N4373C optical test set	1x N4373C optical test set
	2x N4697-60200 f-m flexible test port MW cable	2x 85133-60017 f-m flexible test port MW cable	3x 85133-60017 f-m flexible test port MW cable
	2x 85058-60121 test port adapter (f)-(f)		
	1x N5520B-FG 1.85 mm (f)-(f), adapter DC – 67GHz	1x85056-60006 2.4mm f-f adaptor	1x85056-60006 2.4mm f-f adaptor
	3x 81000NI optical adaptor		
	1x 8121-1242 USB cable	1x 8121-1242 USB cable	1x 8121-1242 USB cable
	1x 1150-7896 Keyboard	1x 1150-7896 Keyboard	1x 1150-7896 Keyboard
	1x 1150-7799 Mouse	1x 1150-7799 Mouse	1x 1150-7799 Mouse
	1x E5525-10285 UK 6 report	1x E5525-10285 UK 6 report	1x E5525-10285 UK 6 report
	1x 4373B-90A01 Getting started	1x 4373B-90A01 Getting started	1x 4373B-90A01 Getting started
	1x 4373B-90CD1 Support CD	1x 4373B-90CD1 Support CD	1x 4373B-90CD1 Support CD
	2x Local power cord	2x Local power cord	2x Local power cord
	1x RoHS addendum for Photonic T&M Accessoires	1x RoHS addendum for Photonic T&M Accessoires	1x RoHS addendum for Photonic T&M Accessoires
	1x RoHS addendum for Photonic T&M products	1x RoHS addendum for Photonic T&M products	1x RoHS addendum for Photonic T&M products
LCA electrical input		1.85 mm (m)	
LCA electrical output		1.85 mm (m)	
LCA optical input 1		9 µm single-mode angled with Agilent universal adapter	
LCA optical input 2		9 µm single-mode angled with Agilent universal adapter	
LCA optical output		9 µm single-mode angled with Agilent universal adapter	
LCA external source input (Option -050 only)		9 µm polarization maintaining single-mode angled, with Agilent universal adapter	

### Storage temperature range

-40° C to +70° C

### Operating temperature range

+5° C to +35° C

### Humidity

15 % to 80 % relative humidity, non-condensing

### Altitude (operating)

0 ... 2000 m


### Recommended re-calibration period

1 year



### Laser Safety Information

All laser sources listed above are classified as Class 1M according to IEC 60825 1 (2001).


All laser sources comply with 21 CFR 1040.10 except for deviations pursuant to Laser Notice No. 50, dated 2001-July-26.

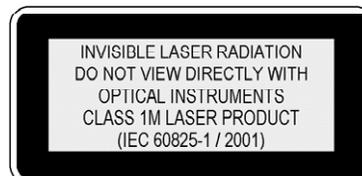

**Mechanical Outline Drawings, option -302, -303, -392, -393 (all dimensions in mm)**

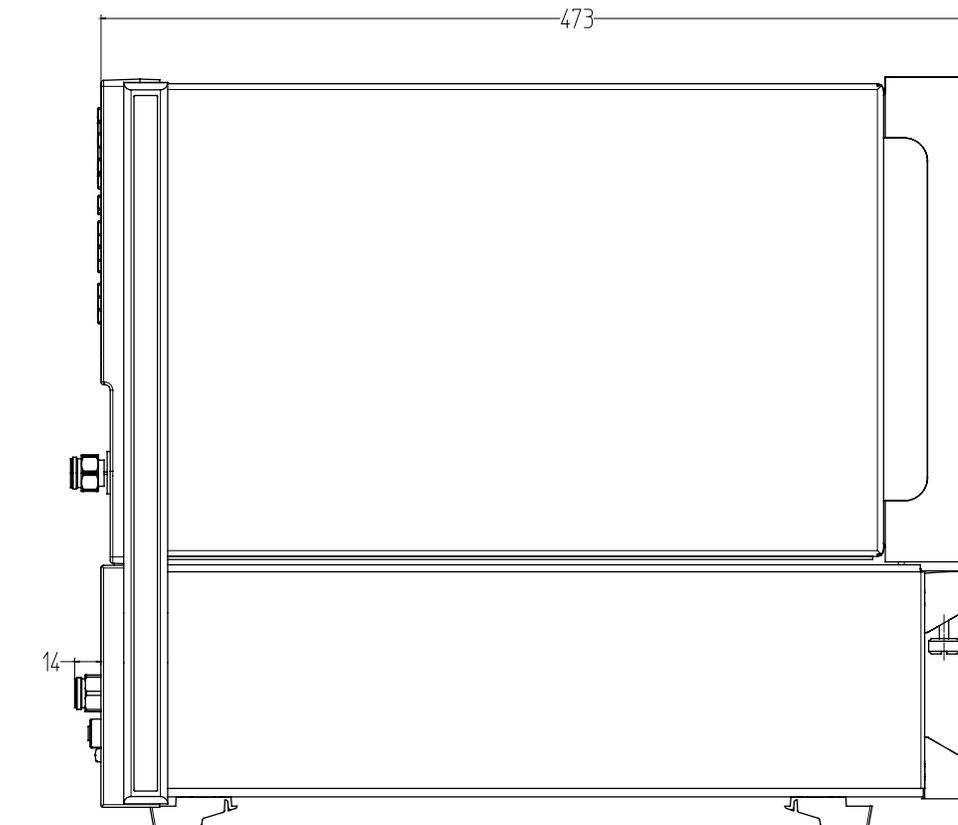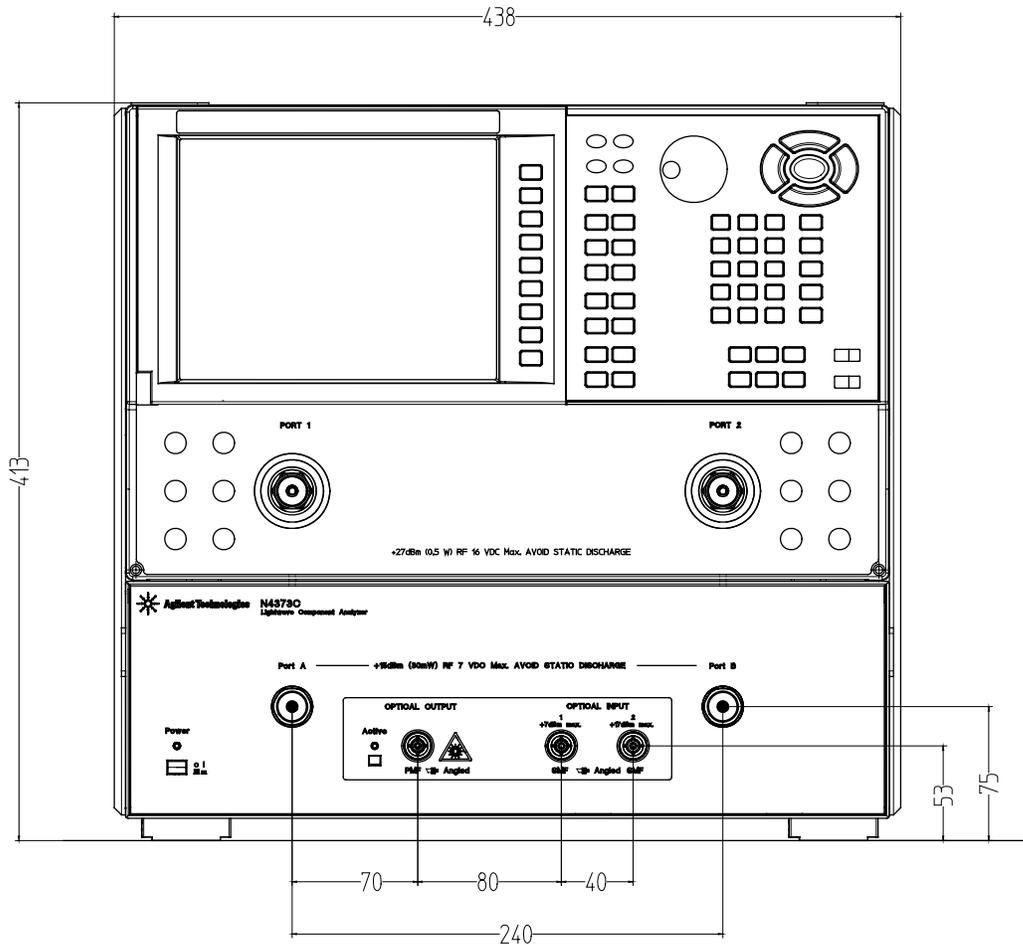

**Mechanical Outline Drawings, option -314, -394 (all dimensions in mm)**

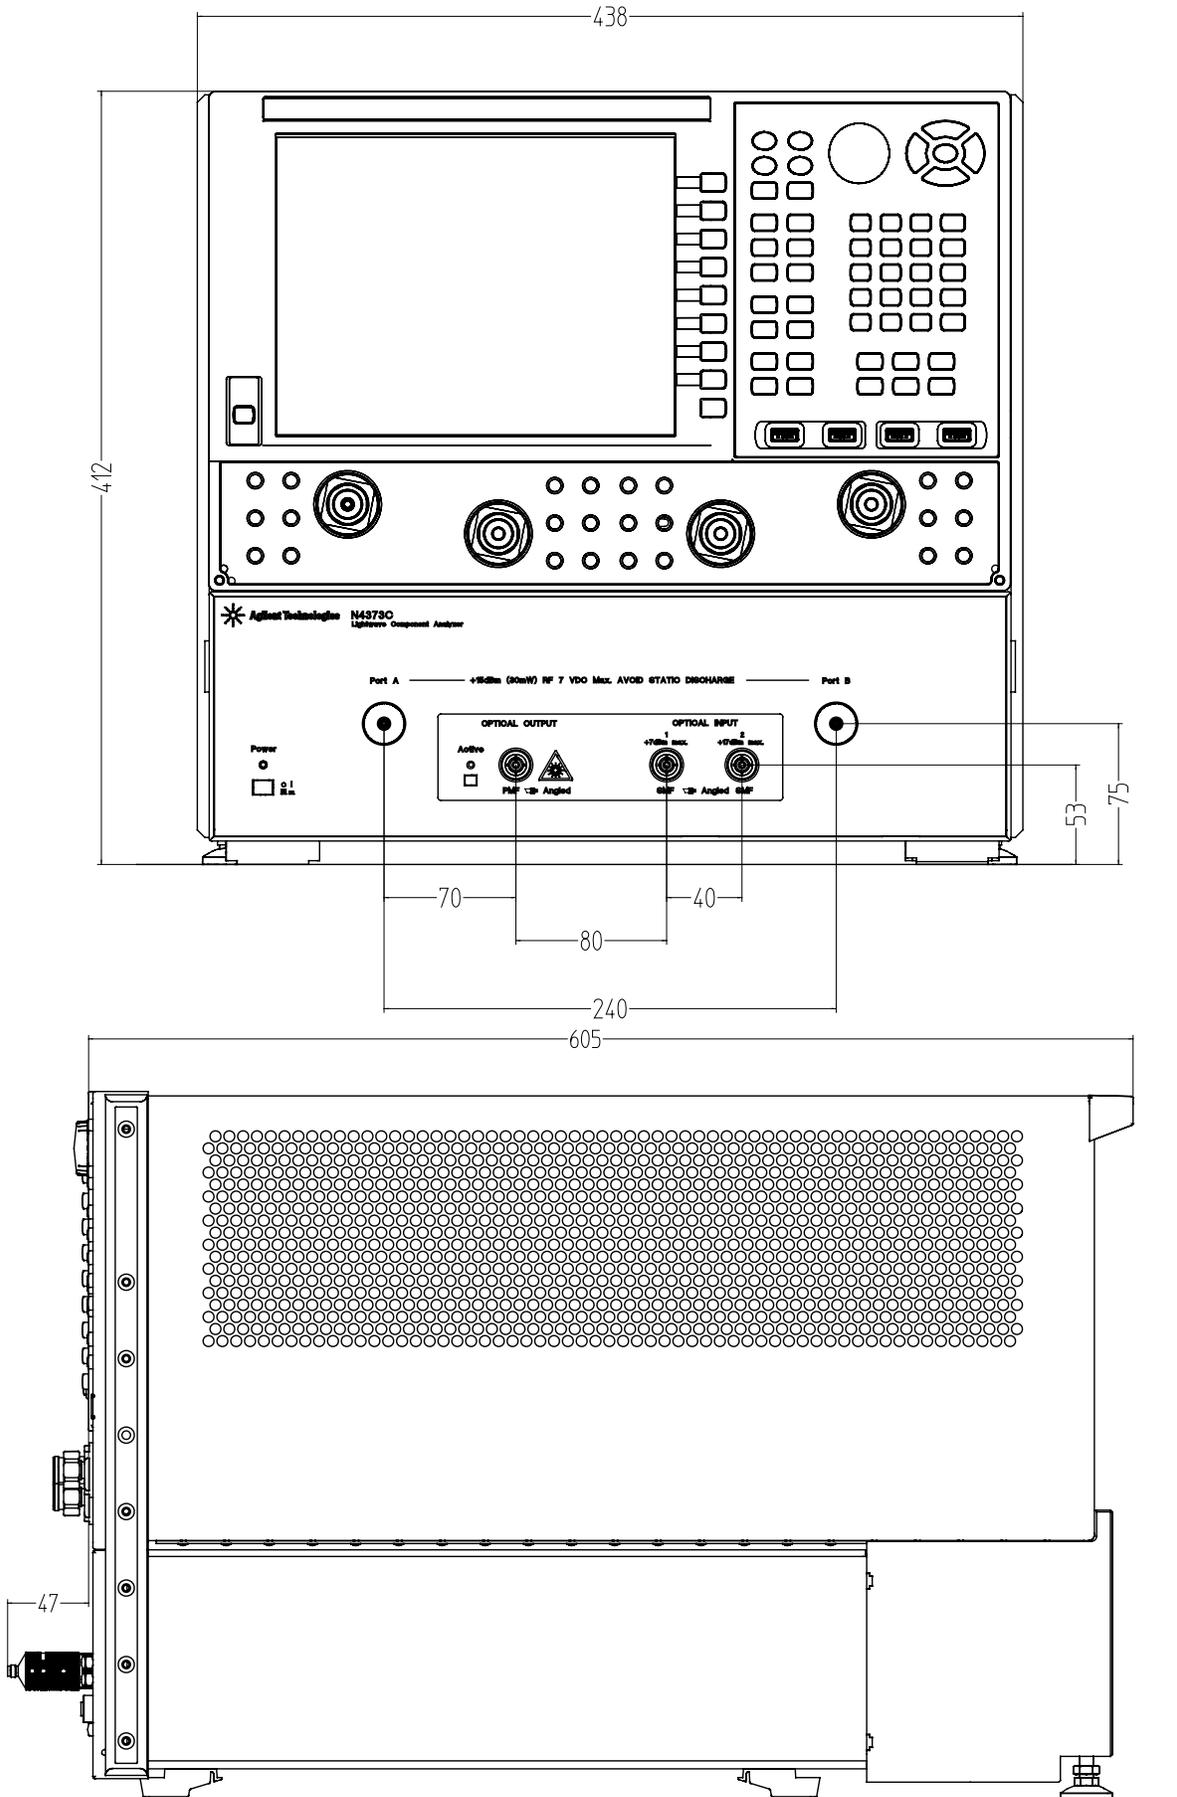

## Ordering informations

The N4373C consists of an optical test set and an electrical network analyzer which are mechanically connected. To protect your network analyzer investment, Agilent offers the integration of an already owned PNA with the optical test set as listed below.

All systems have 1 year warranty.

### N4373C LCA ordering options

Network-analyzer options	
N4373C - 302	67 GHz, 2 port PNA (E8361C-014)
N4373C - 303	40 GHz, 2 port PNA (E8363C-014)
N4373C - 314	50 GHz 4 port PNA-X (N5245A-400)
Network-analyzer integration options	
N4373C - 392	Integration of customer's 67 GHz, 2 port PNA (E8361A/C-014, 010) all other NWA and options selcet E92
N4373C - 393	Integration of customer's 40 GHz, 2 port PNA (E8363A/C-014, 010) all other NWA and options selcet E93
N4373C - 394	Integration of customer's 50 GHz, 4 port PNA (N5245A-400, 010) all other NWA and options selcet E94
N4373C - E92	Integration of E8361A/C with other than above options (all specifications are typical)
N4373C - E93	Integration of E8363A/C or E8364A/C with other than above options. (all specifications are typical)
N4373C - E94	Integration of N5244A or N5245A with 4port other than above options. (all specifications are typical)
Optical wavelength options	
N4373C-100	1310nm Single Wavelength Source
N4373C-101	1550nm Single Wavelength Source
N4373C-102	1310 & 1550 nm Dual Wavelength Source
Configuration independent options	
N4373C-010	Time Domain Operation for Networkanalyzer
N4373C-050	Testset with external optical source Input
N4373C-021	Straight Fiber Interface single mode
N4373C-022	Angled Fiber Interface single mode
Service and Repair	
R1280A	1 year Return-to-Agilent warranty extended to 3 or 5 years
R1282A	Calibration up front support plan 3 or 5 year coverage
Required accessories ( to be ordered separately)	
N4694A	2 port MW Electrical Calibration Module (-00F recommended)





### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



[www.lxistandard.org](http://www.lxistandard.org)

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. We share measurement and service expertise to help you create the products that change our world. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair, reduce your cost of ownership, and move us ahead of your development curve.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



[www.agilent.com/quality](http://www.agilent.com/quality)

## Optical instruments online information

Optical test instruments

[www.agilent.com/find/oct](http://www.agilent.com/find/oct)

Lightwave Component Analyzers

[www.agilent.com/find/lca](http://www.agilent.com/find/lca)

Polarization solutions

[www.agilent.com/find/pol](http://www.agilent.com/find/pol)

Spectral analysis products

[www.agilent.com/find/octspectral](http://www.agilent.com/find/octspectral)

Electro-optical converters

[www.agilent.com/find/ref](http://www.agilent.com/find/ref)

Optical test instruments accessories

[www.agilent.com/find/octaccessories](http://www.agilent.com/find/octaccessories)

Firmware and driver download

[www.agilent.com/find/octfirmware](http://www.agilent.com/find/octfirmware)

Agilent photonic discussion forum

[www.agilent.com/find/photonic\\_forum](http://www.agilent.com/find/photonic_forum)

[www.agilent.com](http://www.agilent.com)

[www.agilent.com/find/lca](http://www.agilent.com/find/lca)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Latin America	305 269 7500
Mexico	01800 5064 800
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

### Europe & Middle East

Austria	43 (0) 1 360 277 1571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201
Other European Countries:	<a href="http://www.agilent.com/find/contactus">www.agilent.com/find/contactus</a>

Revised: July 8, 2010

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2010

Printed in USA, October 7, 2010

5989-9201EN



Agilent Technologies